




Majestic

Aqueous Gloss Media

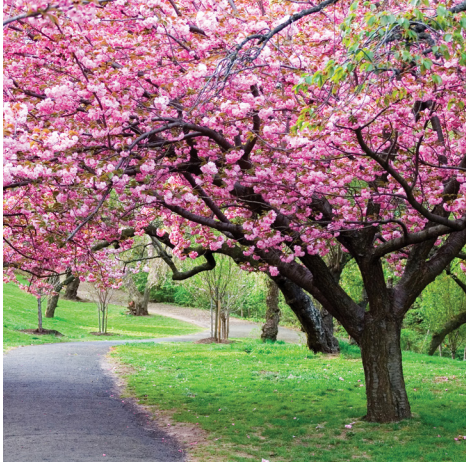

STMP10: Professional satin microporous RC instant dry photo paper

Our STMP10 is a professional grade, high quality, true resin coated photo paper. The lower glare, satin finish is designed to provide art reproductions with high color density, optimal color gradation and perfect image sharpness. Water resistant with excellent drying characteristics.



Benefits:




- Low Glare
- Excellent White Point
- Fast Dry Times

Applications:

- Professional Photography
- Graphic Art Reproductions

Registered Latex Developer 

TECHNICAL DATA: QM-STMP10 – PROFESSIONAL SATIN MICROPOROUS RC PHOTO PAPER

| | | | |
|-----------------|--------------------------|---------------------|--|
| SURFACE FINISH: | Satin | GLOSS MEASUREMENT: | 20 +/- 10% by angle of 60° |
| BASE MATERIAL: | Paper | DURABILITY: | <i>Indoor:</i> Up to 1 year <i>Outdoor:</i> Up to 6 months |
| BASE WEIGHT: | 260 GSM +/- 10% | ROLL LENGTH: | 100 Ft. |
| CALIPER: | 10 Mil | ROLL WIDTHS: | 24", 36", 42" |
| BRIGHTNESS: | 100 (ISO Blue Whiteness) | CORE: | 3" with 2" adapter |
| WHITENESS: | 152 (CIE Ganz) | PRINT SIDE: | Print Side Out |
| OPACITY: | 95 | INK RECOMENDATIONS: |  AQUEOUS  LATEX  UV |



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to one year if stored in proper conditions (cool, dry place 50-80°)

