




Matte WR perforated vinyl w/ adhesive for glass

Perfect for windows, glass and any other transparent surfaces. This 8 mil white PVC with black back and clear removable acrylic adhesive, allows for clean removal for up to 6 months. With a top matte, inkjet coating for water resistance and bold graphics. The stay-flat liner allows for easy installation.

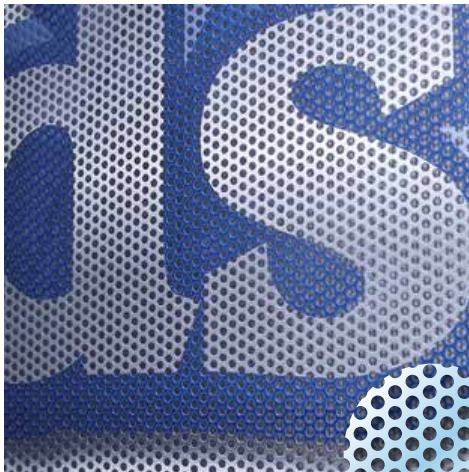

Hole Size: 1.5 mm, Perf Ratio of 70%


Benefits:

- 70% Printable Vinyl for Bold Graphics
- Clean Removal for 6 Months
- Stay Flat Paper Liner
- Made for Inkjet Printers

Applications:

- Window Advertising
- Decals
- POP Signage
- Security View Through Prints

TECHNICAL DATA: MATTE WR PERFORATED VINYL W/ ADHESIVE FOR GLASS

SURFACE FINISH:	Matte	GLOSS MEASUREMENT	3 +/- 10% by angle of 60°
BASE MATERIAL:	PVC	OPACITY:	30% view through
LINER MATERIAL:	Double Sided PE Coated	DURABILITY:	Indoor: Up to 1 year Outdoor: Up to 6 months
LINER WEIGHT:	120 GSM +/- 10%	ROLL LENGTH:	50 FT. & 75 FT.
LINER CALIPER:	5 Mil	ROLL WIDTHS:	36" & 60"
FACE STOCK WEIGHT:	140 GSM +/- 10%	CORE:	2"
FACE STOCK CALIPER:	8 Mil +/- 1	PRINT SIDE:	Print Side Out
BRIGHTNESS:	95 (ISO Blue Whiteness)	INK RECOMMENDATIONS:	 AQUEOUS
WHITENESS:	134 (CIE Ganz)	STORAGE:	Up to six months if stored in proper conditions (cool, dry place 50-80°)



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to six months if stored in proper conditions (cool, dry place 50-80°)